

ENVIRONMENTAL FEATURES

- Operating temperature: from -10°C to +55°C
- Certified: 1293 - CPR - 0597
- Regulation: EN54-3:2001 + A1:2002 + A2:2006, EN54-23:2010
- Volume coverage: 11 (L) x 11 (W) x 5 (H)
- Category: Device for wall or recess mounting installation
- Type: A, for internal environments

MECHANICAL FEATURES

- Dimensions: 307 x 117 x 55 mm
- Weight: 539 gr
- IP rating: 41C

ELECTRICAL FEATURES


- Nominal supply voltage: 24Vcc (20÷30Vcc)
- Power: 1,7 W @24V; 2,4 (DIP7 OFF)
- Current: 100mA average, 140mA peak, 70/90mA low consumption.
- FLASH: frequency 0,6Hz

Power flash	Coverage	Current consumption
Standard	5x11x11m	100mA
Low power	4x9x9m	70mA


- INTERNAL BUZZER: intermittent sound 1983Hz.
- Main sound pattern: pulsed sound a 1.2Hz
- Available sounds: modulated, pulsed, bitonal, continuous

DIP Switch	Acoustic Power a 1 m
ON - ON (Default)	101 dB
ON - OFF	97 dB
OFF - ON	94 dB
OFF - OFF	Sound Deactivated

EXAMPLE OF INSTALLATION IN THE CORRIDOR

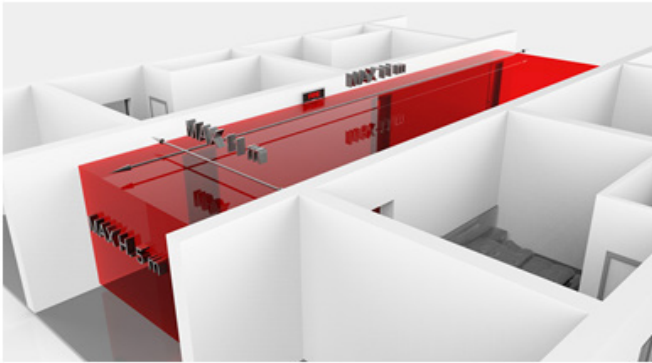


COVERAGE AREA

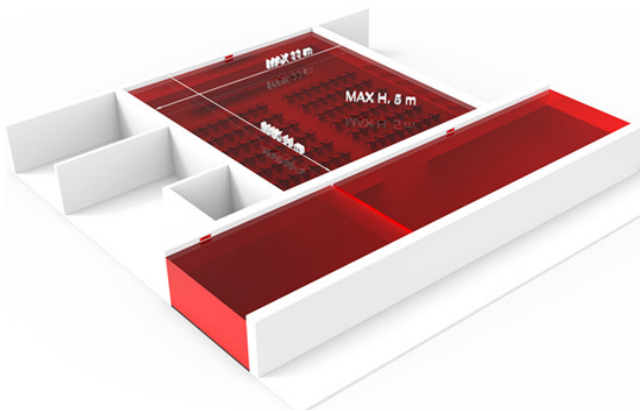

RECESS BOX



MOUNTING HOLE

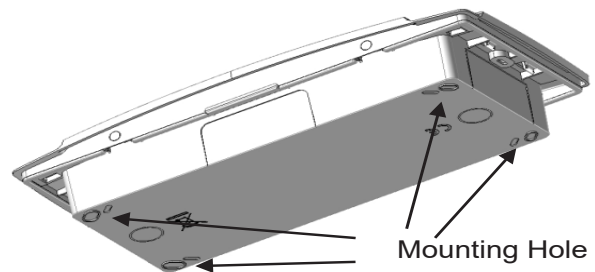

DIMENSIONS



This document has been carefully reviewed, however, the manufacturer disclaims any responsibility for inaccuracies and reserves the right to change it without prior notice. For detailed information contact:
 Honeywell Life Safety Austria GmbH
 Technologiestr. 5, A-1120 Vienna, Austria
 T: +43 1 600 60 30, E-Mail: www.hls-austria.com

SOUND DISPERSION ANGLE

Horizontal	DIP 5=ON /DIP 6=ON 101dB			
	DIP 3 ON DIP 4 ON	DIP 3 ON DIP 4 OFF	DIP 3 OFF DIP 4 ON	DIP 3 OFF DIP 4 OFF
	S1	S2	S3	S4
	min dB @1m			
15	98	98	99	99
45	101	99	102	101
75	98	100	100	99
105	95	100	96	95
135	97	99	99	99
165	99	98	101	100

Vertical	DIP 5=ON /DIP 6=ON 101dB			
	DIP 3 ON DIP 4 ON	DIP 3 ON DIP 4 OFF	DIP 3 OFF DIP 4 ON	DIP 3 OFF DIP 4 OFF
	S1	S2	S3	S4
	min dB @1m			
15	94	100	94	92
45	102	100	103	102
75	106	103	107	106
105	102	100	103	101
135	107	104	108	107
165	98	98	98	97

PRODUCT CODES

CODE	DESCRIPTION
PAN1-PLUS-W	Conventional Audio-Visual device certified EN54.3 /EN 54.23. Matt white with red text film.
PAN1-PLUS-Y	Conventional Audio-Visual device certified EN54.3 /EN 54.23. Matt yellow for extinguishing systems. Two white text film, on grey background: "EVACUATE" and "DO NOT ENTER: EXTIGUISHING IN PROGRESS".
PAN1-PLUS-EN3	Conventional Audio-Visual device certified EN54.3 without flash. Matt white with red film and red text film.
PAN1-PLUS-SW	Metallic bracket for wall mounting for PAN1-PLUS.
PAN1-PLUS-SC	Metallic bracket for ceiling mounting for PAN1-PLUS.
FRONT-PAN1-PL-R	Frame for PAN1-PLUS-EL in fire red with red film.
FRONT-PAN1-PL-G	Frame for PAN1-PLUS-EL in matt grey with red film.
FRONT-PAN1-PL-X	Frame for PAN1-PLUS-EL, available in a different colors. Grey and red films. Minimum order quantity: 20 pieces.
PAN1-PLUS-INC	Recess box for PAN1-PLUS.
EL-PAN1-PLUS-CNV	Bottom without color frame and with conventional electronic card.
TXT-PAN1-PLUS	Special Silkscreen frame for TEXT FILMS not in catalogue.
P-PAN1-P-XXX-G/R	Standard text film on grey or red background.




NOTIFIER[®]
 by Honeywell